



## C65502

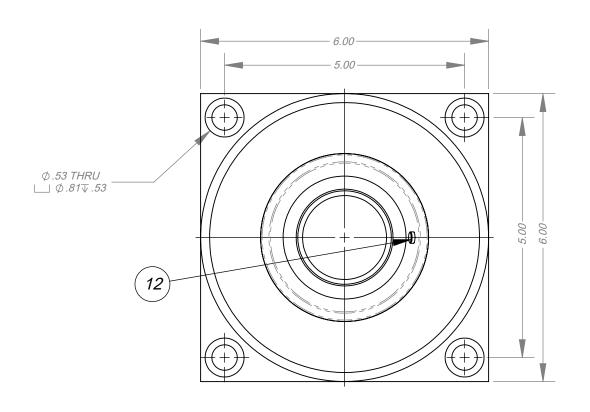



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	01-0898	PIN, 3/16 X 5/8	1
2	01-2046-6	SCR., SHC 5/16-18 X 1.00 BLOX	12
3	04-01-236	O-RING, BUNA, -236	1
4	04-01-238	O-RING, #238	1
5	04-01-248	O-RING, BUNA, 4.734 ID X .139, 70 DURO	2
6	04-31-236	BACKUP RING PARBAK 8	1
7	04-31-238	BACKUP RING PARBACK 8 238	1
8	04-31-248	BACKUP RING PARBAK 8 248	3
9	65-0305	BASE, 42MM FLEX C COLLET CLOSER	1
10	65-0306L	BDY, 42MM FLEX C ANDZ/ENGR.	1
11	65-0307	PST, 42MM FLX C COLLET CLOSER	1
12	65-0308	PIN, ANTI ROT., 42MM FLEX C CLT CLSR.	1

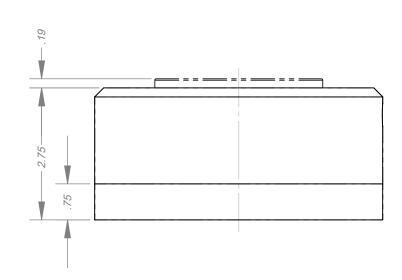

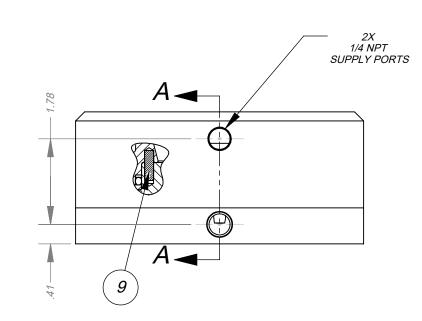

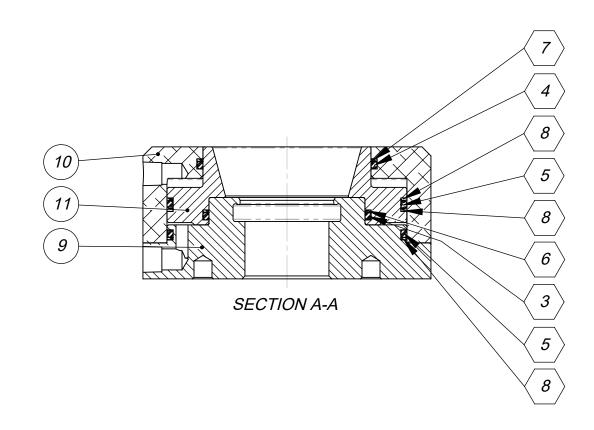

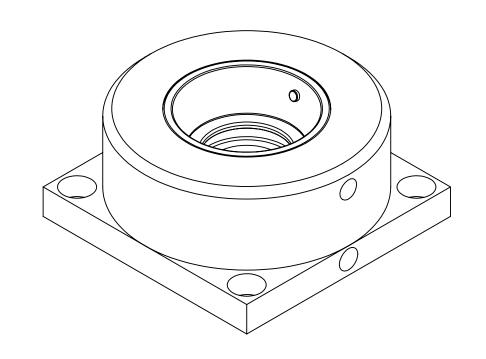

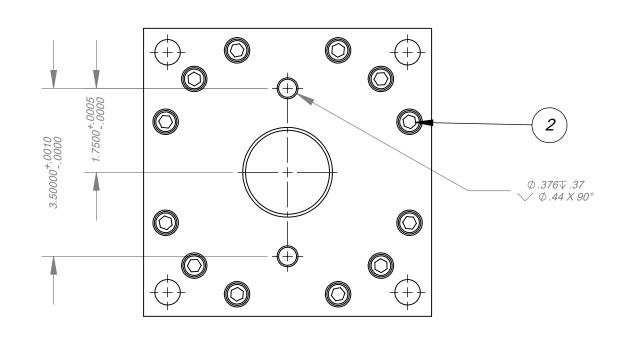

NOTES:
1. MAX. PRESSURE 700 HYD.
2. APROX. RADIAL CAMPING FORCE = 24.15 X PRESSURE.
3. ITEMS IN HEX BALLOONS ARE INCLUDED IN REPAIR KIT 65-0316.

0007 02-25-10 MBR	Tolerances Unless Otherwise Specified: TYPE FINISHED AS CAST			MATERIAL SPEC.	PC. NO.:	65502
	DEC .00 DEC .000 FRACTIONAL ANGLES °	± .015" ± .005" ± 1/64" + 1/2°	± .030" ± .010" ± 1/32" + 1°		MADE F	ROM: SEE B.O.M.
				PROCESS SPEC.	MODEL	FILE: 65502.SLDASM
	FINISH 175 μ in				CAD FIL	E: <i>65502.slddrw</i>
	COLLET CLOSER, 42MM FLEX				<b>C</b> 6	5502

	LEXAIR	C 65502					
`.		DRAWN	CHECKED	APRVD.	SHEET NO.	1 of 1	
7	7 Lexair, Inc.,	MBR	MBR	MBR	SCALE	1:2	

2025 Mercer RD, Lexington, Kentucky 40511 02-25-10 02-25-10 02-25-10 APPROX. WT. 14.550

SHEETS

**REVISIONS**